




360 LARGE IP65

The Flex Strip 360 LED from LEDscape is a high quality, flexible LED strip with a unique co-extrusion technology. The combination of high quality and exceptional flexibility, allows for an endless range of indoor and outdoor applications.

PRODUCT HIGHLIGHTS

- **BINNING:** ±50K
- **CRI:** >90
- **EXPECTED LIFETIME:** L70 > 50,000 hours
- **OPERATING TEMP:** 22°F – 131°F (-30°C – 55°C)
- **DEGREE OF PROTECTION:** IP65
- **Rating:** UL
- **BENDING RADIUS:** 4.72 in
- **OPERATING VOLTAGE:** 24V or 48V, constant voltage
- **WARRANTY:** 3 year (outdoor), 5 year (indoor)
- **FEATURES:** Dimmable, Plug & Play, Assorted colors, Accessories available, Effective heat dissipation, Excellent lumen/watt ratio, very flexible, custom output, custom colors.

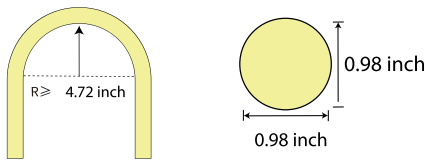

AVAILABLE COLORS

- Ultra Warm White 2400K
- Extra Warm White 2700K
- Warm White 3000K
- Cool White 3500K
- Natural White 4000K
- Cold White 6500K
- Custom

CHARACTERISTICS

	Power	Voltage	Lumen	Length Increments ¹	Max Run Length ²
360-L24	4.9 w/ft	24v	285 lm/ft	0.47 in	16.4 ft
360-L48	4.2 w/ft	48v	120 lm/ft	3.28 in	65.6 ft

Notes:
 1. **Length Increments:** Refers to the Strip's cuttable segments.
 2. **Max Run Length:** Refers to the Strip's total run lengths from the connector to the end.

MAX. connection length between -4 °F and -22 F is 1/3 of listed above. Lumen calculated at 2700K, please request individual datasheets if needed. LEDscape reserves the right to modify the information above without notice. Surge protection must be present on all circuits with LEDscape product to qualify for warranty.


ORDERING CHART

Example: 10-Flex-360-L24-30-S65-HC

Length	LED Stock Code	Series		Color		Environment		Mounting	
		Series	Voltage	Temp	Color	Environment	Mounting	Mounting	
1-65 ft	FLEX LED Strip (Outdoor IP65)	360-L24	24v	24	2400k	S65	Straight IP65	HC	Horizontal flush
		360-L48	48v	27	2700k	SA65	Side IP65	VC	Cable 8ft
				30	3000k			TR	Telescoping
				35	3500k			VFL	Vertical Flush
				40	4000k			2VC	2-point
				65	6500k			FCL	Flat Clip
				CU	Custom Color			HCC	Horizontal Cable
								CirC	Circle Cable
								REC	Recessed Trimless
								CUP ³	Custom Pendant

Notes:
 Product Ships IP67 w/ factory installed Connection. Stock code may differ from UL/ETL certification, consult factory if required.


FLEX STRIP CONNECTORS



S65 STRAIGHT CONNECTOR SET IP65

Part #: Flex-360-L-Conn-S65


Cord length: 6 ft

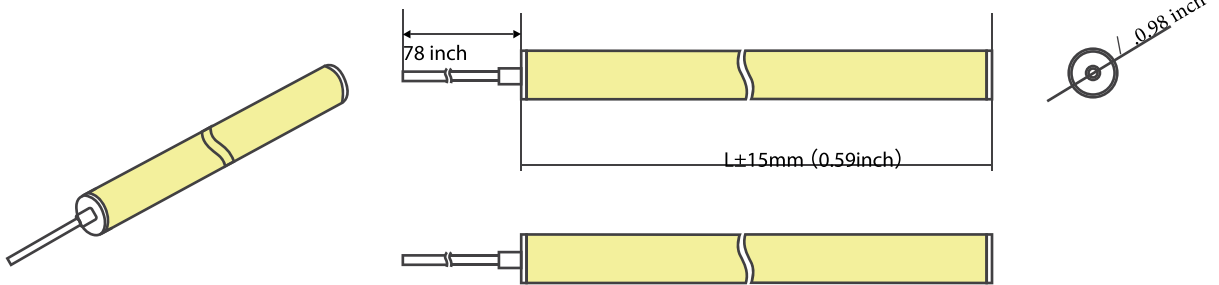

SA65 SIDE CONNECTOR SET IP65


Part #: Flex-360-L-Conn-SA65

Cord length: 6 ft

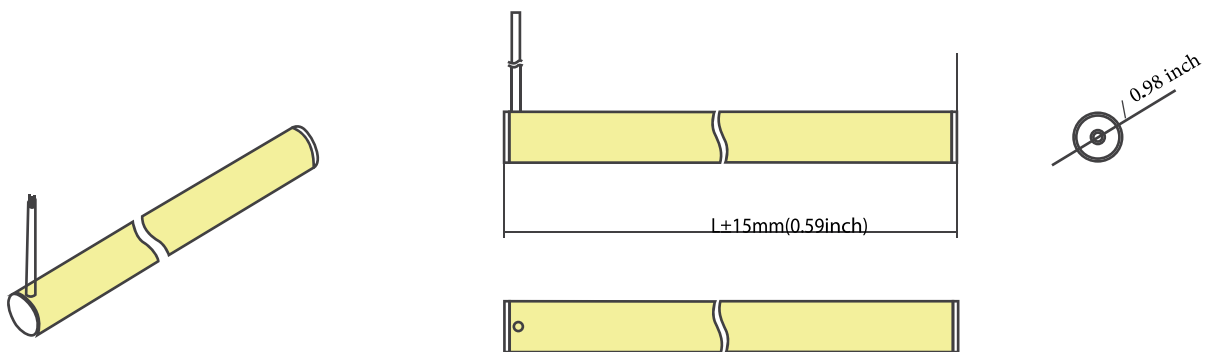


Note: IP67 Connector ships factory assembled with corresponding end cap. Customer may elect to cut and use IP40/65 end cap in the field, but installed assumes all responsibility for correct waterproofing and does not fall under factory warranty.


MOUNTING




HORIZONTAL CEILING
 Part #: Flex-360-L-Mount-HC
 Length per piece: 3 ft




VERTICAL FLUSH
 Part #: Flex-360-L-Mount-VFL




VERTICAL CABLE
 Part #: Flex-360-L-Mount-VC3
 Cord length: 3 ft
 Part #: Flex-360-L-Mount-VC3
 Cord length: 8 ft




2-POINT CEILING
 Part #: Flex-360-Mount-L-2VC



TELESCOPIC ROD
 Part #: Flex-360-L-Mount-TR-W (white)
 Part #: Flex-360-L-Mount-TR-B (black)
 Length: 12-24 inch adjustable




HORIZONTAL CABLE
 Part #: Flex-360-Mount-L-HCC




CIRCULAR CABLE
 Part #: Flex-360-Mount-L-CirC



Recessed Trimless
 Part #: Flex-360-Mount-L-REC
 Mud-In Flange for recessed installation.



FLAT CLIP
 Part #: Flex-360-Mount-L-FLC



CUSTOM PENDANT
 Part #: Flex-360-Mount-L-CUP



LEDSCAPE OUTDOOR POWER SUPPLY


The LEDscape Series of Constant Voltage Class 2 LED Drivers from offers both cETLus style enclosures. The enclosure has a built-in junction box on both the input and output. These drivers are IP68 and are suitable for all locations. With universal input voltage ranging from 120 to 277VAC, this series of drivers are designed for commercial, industrial and residential applications. Our 5in1 smooth flicker-free linear dimming down to 1% and a wide variety of compatible dimmers, including 0-10V, Magnetic and Low voltage.

PRODUCT HIGHLIGHTS

- **INPUT VOLTAGE:** 120/277 V
- **OUTPUT VOLTAGE:** Variable 18-25V
- **INPUT FREQUENCY:** 50/60 HZ
- **OPERATING TEMP:** -13°F – 104°F
- **DEGREE OF PROTECTION (IP):** IP68
- **DIMMABLE:** to 1%
- **CLASS 2:** All sizes
- **LOAD REQUIREMENTS:** 10%

Note: If using outdoor, verify contractor use included water and moisture tight enclosure. Not direct burial rated.

POWER AND CONNECTION DIAGRAM

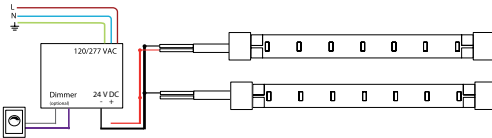

POWER SUPPLY = Product Wattage X Length

OPTIONS:

24 Nominal supply voltage of LEDscape in Volt
Recommended MAC output of power supply 80%

To calculate MAX run distance from Power Supply to LED
reference power drop chart : [Here](#).

CHARACTERISTICS

Power	Output Current	Efficiency	Power Factor	Dimensions
30W	1250mA	> 86%	>0.95	7.50" L X 3.62" W X 1.65"H
60W	2600mA	> 86%	>0.95	7.50" L X 3.62" W X 1.65"H
96W	4800mA	> 86%	>0.95	8.50" L X 3.66" W X 1.65"H
120W (2x60 watt)	5000mA	> 86%	>0.93	10.15" L X 4.85" W X 1.65"H
192W (2x96 watt)	8000mA	> 86%	>0.93	10.15" L X 4.85" W X 1.65"H
288W (3x96 watt)	8000mA	> 86%	>0.93	12.44" L X 4.85" W X 1.65" H
384W (4x96 watt)	16000mA	> 86%	>0.93	12.44" L X 4.85" W X 1.65" H

ORDERING CHART

NOTE: View additional options [here](#).

Ordering Example: PS-24-0-D3-60-U

Series		Output Voltage		Environment		Dimming		Wattage		Voltage Input	
PS	Power supply	24	24V	0	Outdoor/Indoor	ND	Non Dimming	30	10-30W	U	120/277V
						D3	5 in 1 Dimming	60	31-60W		
								96	61-96W		
								120	97-120W		
								192	121-192W		
								288	193-288W		
								384	289-384W		
								CU	Custom Output		

DISCLAIMER: The information on these pages are as accurate as possible, however LEDscape or any reseller of LEDscape cannot be held liable for any damages resulting from errors or outdated information. LEDscape reserves the right to modify the information without informing the customers. Check for the latest version on the Internet, the most up to date information will be published on www.ledscape.com. Qualified and Licensed Electrical Contractor must install the product. This product should not be used in applications, devices or systems where incorrect operation of the product may result in personal injury (includes emergency lighting) without written permission from LEDscape. If nevertheless used in such applications, devices or systems LEDscape cannot be held liable for any resulting injury.