



## LBCOVE INDOOR FIXTURE

The LBCove indoor is linear White light bar designed for Wall Washing, Grazing, Cove & Flood illumination for interior applications. Select from 12" & 48" lengths. Our fixtures have integrated power supplies. Designed in the United States.

### PRODUCT HIGHLIGHTS

- **BINNING:** ± 50K
- **CRI:** 90
- **IP RATING:** IP45
- **STARTER CABLE:** 10 FT, Custom
- **EXPECTED LIFETIME:** L70 > 50,000 hours
- **OPERATING TEMP:** - 40 ° F to 122 ° F
- **RATING:** ETL
- **HOUSING:** Aluminum
- **VOLTAGE:** 120/277
- **WARRANTY:** 5 Years
- **DIMMABLE:** 0-10V, Triac, and Custom
- BAA available, consult factory

### AVAILABLE COLORS

- Extra Warm White 1800K
- Ultra Warm White 2200K
- Extra Warm White 2700K
- Warm White 3000K
- Cool White 3500K
- Natural White 4000K
- Custom

### CHARACTERISTICS



Power	MAX Lumen	MAX Run Length	Dimming
5/7.5/10 w/ft (selectable)	1200 lm/ft	64 ft @120v / 120 ft @ 277v	0-10V, triac
<small>Notes: Lumen calculated at 2700K, 30 degree. Max Run calculated with 4 ft fixtures</small>			

### ORDERING CHART



Example: LBCove-I-1-22-20-U-D1

Model	Length		Environment	Color		Optics				Voltage		Dimming	
	1	4		18	22	20	25	30	CU	U	D1	D2	CU
LBCove	1	1 ft	I Indoor IP45	18	1800k	20	20°	ASY15	Asymmetric 15°	U	120/277v	D1	0-10V
	4	4 ft		22	2200k	35	35°	ASY25	Asymmetric 25°			D2	ELV/Triac
				27	2700k	50	50°	ASY30	Asymmetric 30°			CU	Custom
				30	3000k	1570	15°x 70°	CU	Custom				
				35	3500k	4070	40x70°						
				40	4000k	110	110°						
				CU	Custom	BAT	Batwing						

**DIMENSIONS**

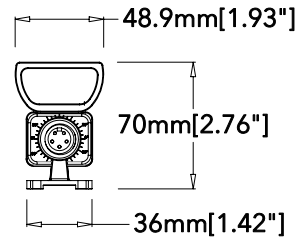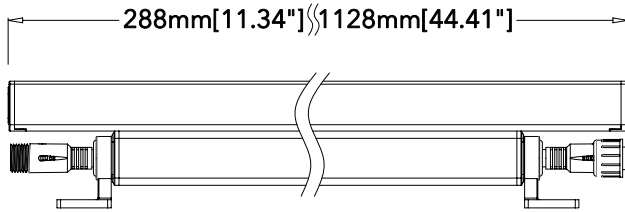

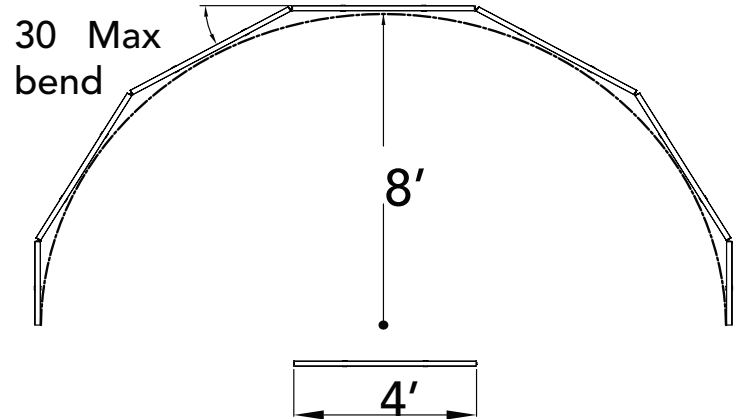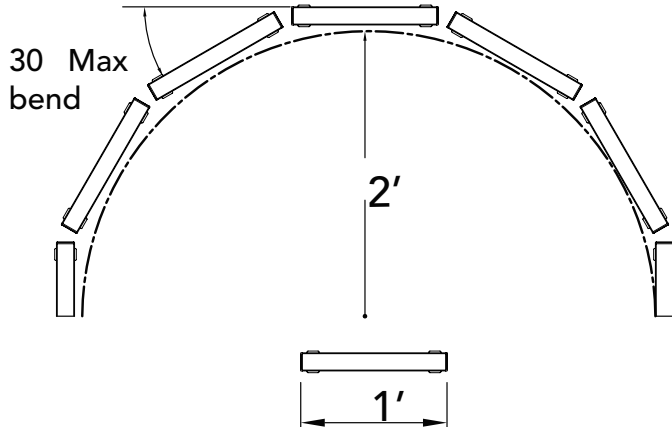

**Radius Bend :**



**LBCove CORDS (not included)**

**Starter & Cable:**

Product	Part Number	Length	Application	Conductor Size
	LBCove-I-Start10	10 ft	Starter Cable	16AWG
	LBCove-I-JMP1	1 ft	Jumper	
	LBCove-I-JMP4	4 ft		